

WAAS CH <b>86429</b> <b>W12A</b>	APP CRS <b>114°</b>	Rwy Idg TDZE Apt Elev	<b>3899</b> <b>811</b> <b>813</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 12

SHAWANO MUNI (E/ZS)


**⚠** Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Straight-In/Circling Rwy 12 procedure NA at night. Circling to Rwy 35 NA at night. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA 77 feet and all MDA 80 feet and increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats visibility 1/4 mile, and LNAV and Circling Cats C and D visibility 1/4 mile.

**MISSED APPROACH:**  
Climb to 2500 direct HISAV and hold.

AWOS-3  
**118.65**


GREEN BAY APP CON ★  
**119.4 338.2**

UNICOM  
**122.8 (CTAF) 0**

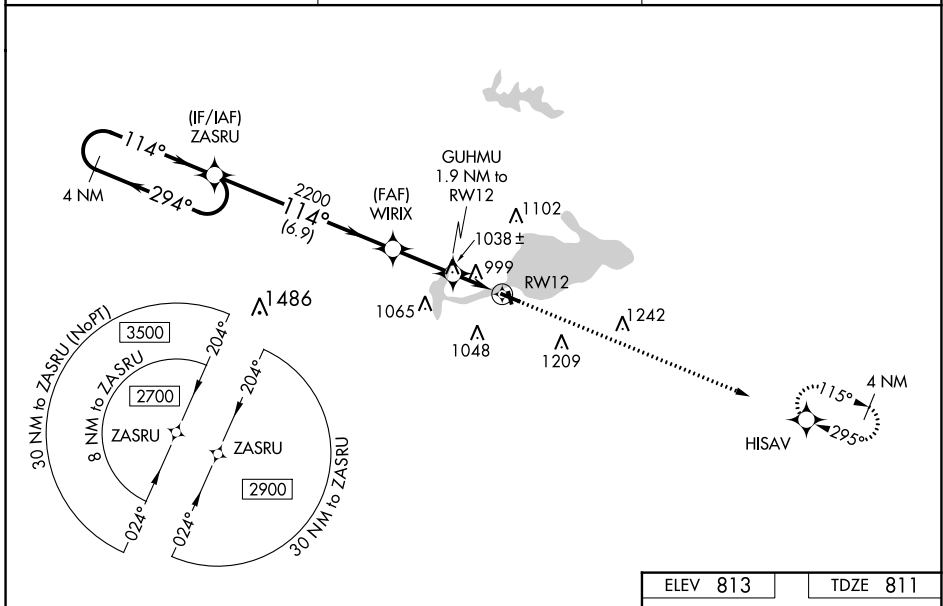


EC-3, 17 JUN 2021 to 15 JUL 2021

EC-3, 17 JUN 2021 to 15 JUL 2021

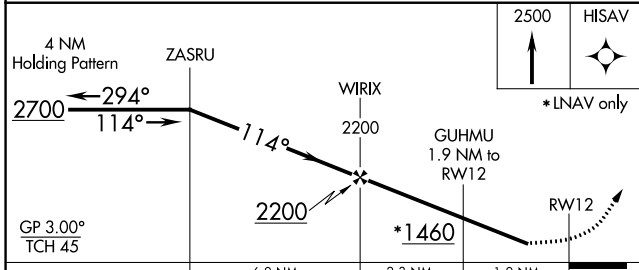

ELEV 813	TDZE 811
----------	----------

CATEGORY	A	B	C	D
LPV DA		1082-1	271 (300-1)	
LNAV/VNAV DA		1378-2	567 (600-2)	
LNAV MDA	1300-1	489 (500-1)	1300-1 3/8	489 (500-1 3/8)
CIRCLING	1340-1 527 (600-1)	1440-1 627 (700-1)	1440-1 3/4 627 (700-1 3/4)	1560-2 1/2 747 (800-2 1/2)



WATER ALL-WAY:  
12000 X 1000

MIRL Rwy 12-30 and 17-35 0

WAAS CH <b>77729</b> <b>W30A</b>	APP CRS <b>295°</b>	Rwy Idg TDZE Apt Elev	<b>3899</b> <b>810</b> <b>813</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 30

SHAWANO MUNI (E/ZS)



**⚠** Baro-VNAV and VDP NA when using Green Bay altimeter setting. Helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. Circling to Rwy 12 and 35 NA at night. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA 77 feet and all MDA 80 feet and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat B, and Circling Cats B and D visibility 1/4 mile, increase LNAV Cat C and D visibility 1/2 mile.

**MISSED APPROACH:**  
Climb to 2700 direct ZASRU and hold.

AWOS-3 <b>118.65</b>	GREEN BAY APP CON * <b>119.4 338.2</b>	UNICOM <b>122.8 (CTAF)</b>
-------------------------	---	-------------------------------

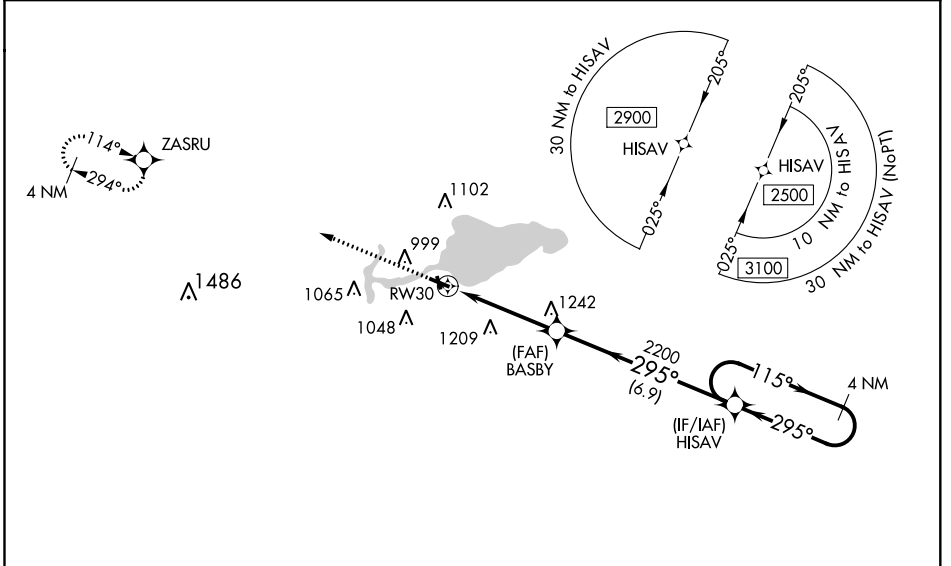

ELEV 813	TDZE 810
----------	----------

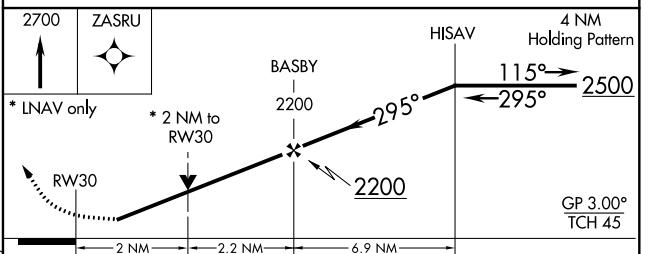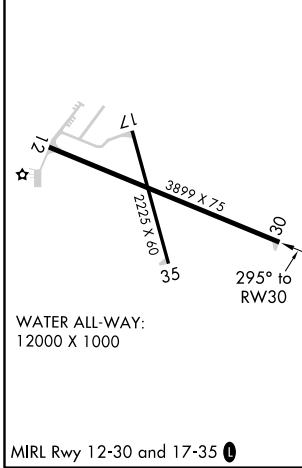

CATEGORY	A	B	C	D
LPV DA		1097-1	287 (300-1)	
LNAV/VNAV DA		1456-2 1/4	646 (700-2 1/4)	
LNAV MDA	1500-1	690 (700-1)	1500-2	690 (700-2)
CIRCLING	1500-1	687 (700-1)	1500-2 687 (700-2)	1560-2 1/2 747 (800-2 1/2)

EC-3, 17 JUN 2021 to 15 JUL 2021

EC-3, 17 JUN 2021 to 15 JUL 2021